


КОМПЮТЪРНИ КОМПОНЕНТИ > Дънни Платки

ASROCK H610M-HVS/M.2 R2.0

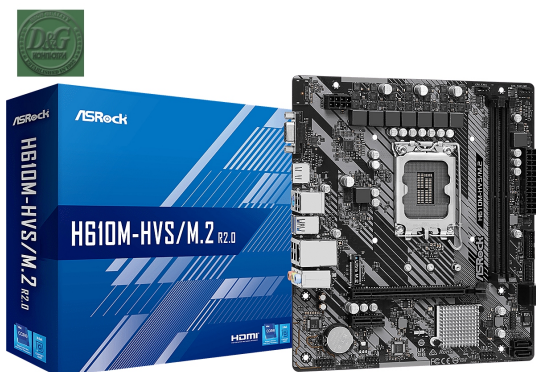

Модел : ASROCK H610M-HVS/M.2 R2.0/DDR4

ASROCK H610M-HVS/M.2 R2.0

Graphics: - Intel® Xe Graphics Architecture (Gen 12); - Dual graphics output: support HDMI and D-Sub ports by independent display controllers; - Supports HDMI 2.1 TMDS Compatible with max. resolution up to 4K x 2K (4096x2160) @ 60Hz; - Supports D-Sub with max. resolution up to 1920x1200 @ 60Hz; - Supports HDCP 2.3 with HDMI 2.1 TMDS Compatible Port

CPU's supported: - Supports 13th Gen & 12th Gen Intel® Core™ Processors (LGA1700); - 7 Power Phase design; - Supports Intel® Hybrid Technology; - Supports Intel® Turbo Boost Max 3.0 Technology

Chipset: - Intel® H610

Expansion Slots: CPU: - 1 x PCIe 4.0 x16 Slot (PCIe2), supports x16 mode*; Chipset: - 1 x PCIe 3.0 x1 Slot (PCIe1)

Storage: Chipset: - 1 x Ultra M.2 Socket (M2_2, Key M), supports type 2242/2260/2280 PCIe Gen3x4 (32 Gb/s) mode*; - 4 x SATA3 6.0 Gb/s Connectors

Memory type: - Dual Channel DDR4 Memory Technology; - 2 x DDR4 DIMM Slots; - Supports DDR4 non-ECC, un-buffered memory up to 3200; - Supports ECC UDIMM memory modules (operate in non-ECC mode); - Max. capacity of system memory: 64GB; - Supports Intel® Extreme Memory Profile (XMP) 2.0

I/O: - 1 x PS/2 Mouse/Keyboard Port; - 1 x D-Sub Port; - 1 x HDMI Port; - 2 x USB 3.2 Gen1 Ports (Supports ESD Protection); - 4 x USB 2.0 Ports (Supports ESD Protection); - 1 x RJ-45 LAN Port with LED (ACT/LINK LED and SPEED LED); - HD Audio Jacks: Line in / Front Speaker / Microphone

Connectors: - 1 x SPI TPM Header; - 1 x Chassis Intrusion and Speaker Header; - 1 x CPU Fan Connector (4-pin)*; - 1 x Chassis/Water Pump Fan Connector (4-pin) (Smart Fan Speed Control)**; - 1 x 24 pin ATX Power Connector; - 1 x 8 pin 12V Power Connector; - 1 x Front Panel Audio Connector; - 1 x USB 2.0 Header (Supports 2 USB 2.0 ports) (Supports ESD Protection); - 1 x USB 3.2 Gen1 Header (Supports 2 USB 3.2 Gen1 ports) (Supports ESD Protection)

Audio: - 7.1 CH HD Audio (Realtek ALC897/887 Audio Codec); - Supports Surge Protection

LAN: - PCIe x1 Gigabit LAN 10/100/1000 Mb/s; - 1 x Realtek

RTL8111H; - Supports Wake-On-LAN; - Supports
Lightning/ESD Protection; - Supports Energy Efficient
Ethernet 802.3az; - Supports PXE
BIOS: - 128Mb AMI UEFI Legal BIOS with multilingual GUI
support; - ACPI 6.0 Compliant wake up events; - SMBIOS
2.7 Support; - CPU Core/Cache, CPU Core/Cache
Load-Line, CPU GT, CPU GT Load-Line, DRAM, +0.82V
PCH, +1.05V PCH, VCCIN AUX, +1.8V PROC, +1.05V
PROC Voltage Multi-adjustment
Form Factor: - Micro ATX Form Factor: 8.76-in x 7.4-in, 22.3
cm x 18.8 cm; - Solid Capacitor design
OS: - Microsoft® Windows® 10 64-bit / 11 64-bit
Warranty: 36 Months

Цена : 151.42лв с ДДС

Наличност: Този продукт е бил добавен в нашия каталог на Wed 19 April, 2023