


МРЕЖОВА ТЕХНИКА > СУИЧОВЕ

D-Link 8-Port 2.5G Base-T PoE, 2-port 10G SFP+ and 2x 10G RJ45 port Smart Managed Switch

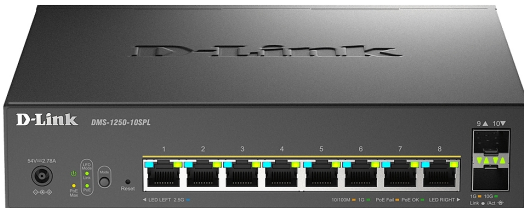

Модел : DMS-1250-10SPL

D-Link 8-Port 2.5G Base-T PoE, 2-port 10G SFP+ and 2x 10G RJ45 port Smart Managed Switch

Суич, тип: Fixed Port

Общ брой портове: 10

Основни портове, тип: 8x10/100/1000/2500Base-T

Power Over Ethernet (PoE): IEEE 802.3af/at (30W), IEEE 802.3bt (60W) PoE Standard, PoE Capable Ports: Port (1-2) - 802.3bt ports, Port (3-8) - 802.3at ports; PoE Power Budget: 120 W

Uplink портове: 2x10GE SFP

Свободни (10GB) слотове: No

Управление: Web-based GUI, Full CLI, Telnet Server, TFTP Client, Auto MDI/MDIX, SNMP (Supports v1/v2c/v3), SNMP Trap, Backup/upgrade firmware, Smart Wizard, Upload/download configuration file, BootP/DHCP Client, System Log, RMONv1, Trusted host, Command logging

Stackable: No

Fans: Fanless

Захранване: External power supply: DC 54V/2.78A, Maximum Power Consumption: 147 W (PoE on)

Routing: Layer 3 Lite

Памет (Flash, RAM): Flash Memory: 32 MB, DRAM: 512 MB

Капацитет за маршрутизиране/превключване, Gbps: 80 Gbps

Пропускателна способност, Mpps: 59.53 Mpps

MAC адреси: 16000 MAC address table size

VLAN (брой, стандарти): 802.1Q; VLAN Group - Max. 4094 static VLAN groups; Configurable VID from 1 - 4094;

Asymmetric VLAN; Auto Voice VLAN; Auto Surveillance VLAN

QoS: 802.1p Quality of Service; 8 queues per port; Queue Handling - Strict, WFQ, Weighted Round Robin (WRR); Bandwidth Control - Port-based (ingress/egress, min granularity 10/100/1000 is 16 Kbps)

L2 мрежови стандарти: IEEE 802.3u, IEEE 802.3ab, IEEE 802.3bz, IEEE 802.3an, IEEE 802.3ae, IEEE 802.3z, IEEE 802.3az, IEEE 802.3ad, IEEE 802.3x, IEEE 802.1D, IEEE 802.1w, IEEE 802.1s, IEEE 802.1p, IEEE 802.1Q, IEEE 802.1X, IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt

L3 мрежови стандарти: Static route: 128 IPv4 static route entries, 64 IPv6 static route entries

IPv6 functionality: IPv6 Neighbor Discovery (ND); IPv6

address: Source/destination IP address prefix length, DSCP, Protocol type, TCP/UDP port number, IPV6 traffic class

Сигурност: Broadcast/Multicast/Unicast Storm Control, D-Link Safeguard Engine, Traffic segmentation, TLS v.1.2, DoS attack prevention, 802.1X, Port Security - Supports up to 64 MAC addresses per port, DHCP, IP-MAC-Port Binding, Password encryption

Размери (Ш, Д, В), mm: 210 x 210 x 44 mm

Опция за монтаж: Desktop

Цена : 405.00 EUR с ДДС

Наличност: Този продукт е бил добавен в нашия каталог на Чт 26 февруари, 2026