


МРЕЖОВА ТЕХНИКА > СУИЧОВЕ

## Cisco Catalyst 1300X 24-port 2.5GE, UPoE, 4x10G SFP+

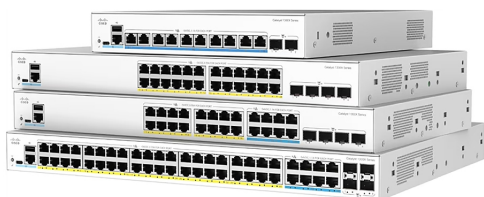

Модел : C1300X-24MU-4X

Cisco Catalyst 1300X 24-port 2.5GE, UPoE, 4x10G SFP+

Суич, тип: Fixed Port

Общ брой портове: 28

Основни портове, тип: 16x 2.5G 30W PoE+ ports + 8x 2.5G 60W PoE++ ports

Power Over Ethernet (PoE): 802.3bt (Type 3) PoE++ and 802.3at PoE+; Power dedicated to PoE: 740W; Number of ports that support PoE: 24

Uplink портове: 4x10G SFP+ (10G Uplink, 25G available for stacking only)

Свободни (10GB) слотове: -

Управление: Cisco Business Dashboard; Cisco Business mobile app; Cisco Network Plug and Play (PnP) agent; Web user interface; SNMP; MIB; RMON; RSPAN; sFlow agent; DHCP; SCP; Other: Traceroute, single IP management, HTTP/HTTPS, SSH, RADIUS and etc.

Stackable: Supports up to 8 switches in a stack. Up to 400 ports managed as a single system with hardware failover

Fans: 1

Захранване: 100-240V 50-60 Hz, internal, universal

Routing: Dynamic Layer 3 routing

Памет (Flash, RAM): 1GB SLC (Flash), 2 GB DDR4 (DRAM), 3MB (Packet buffer)

Капацитет за маршрутизиране/превключване, Gbps: 200 Gbps

Пропускателна способност, Mpps: 148.80 Mpps

MAC адреси: 16 000 addresses

VLAN (брой, стандарти): Support for up to 4093 VLANs simultaneously; Port-based and 802.1Q tag-based VLANs, MAC-based VLAN, protocol-based VLAN, IP subnet-based VLAN; Management VLAN;

Private/Guest/unauthenticated/Auto

surveillance/CPE/Voice/Dynamic/Multicast TV VLAN

QoS: 8 hardware queues; Strict priority and Weighted Round-Robin (WRR); Class of service: Port-based, 802.1p VLAN priority-based, IPv4/IPv6 IP precedence/Type of Service (ToS)/DSCP-based; Queue assignment based on DSCP and Class of Service (802.1p/CoS); iSCSI

L2 мрежови стандарти: IEEE 802.3, IEEE

802.3u/ab/ad/z/x/af/at; IEEE 802.1D (STP)/1Q/p VLAN/w

RSTP/s Multiple STP/X Port Access Authentication; RFC

IPv6 functionality: IPv6 host mode, IPv6 over Ethernet, dual

IPv6/IPv4 stack IPv6 neighbor and router discovery (ND), IPv6 stateless address auto-configuration; DAD; IPv6 QoS; IACL; First Hop Security; Multicast Listener Discovery (MLD v1/2) snooping; MLD

Сигурност: SSH v1 and v2, SCP, SSL, 802.1X: RADIUS authentication and accounting; Web-based authentication; STP; DHCP; IPSG; DAI; IPMB; SCT; SSD; Trustworthy systems; Private VLAN; Layer 2 isolation Private VLAN Edge; Port security; RADIUS/TACACS+; DoS prevention

Размери (Ш, Д, В), mm: 444.3 x 270 x 43.94 mm

Опция за монтаж: Rackmount

Цена : 1842.30&nbsp;EUR с ДДС

Наличност: Този продукт е бил добавен в нашия каталог на Вт 28 април, 2026